


3000 Series Swivels

ORDERING GUIDE

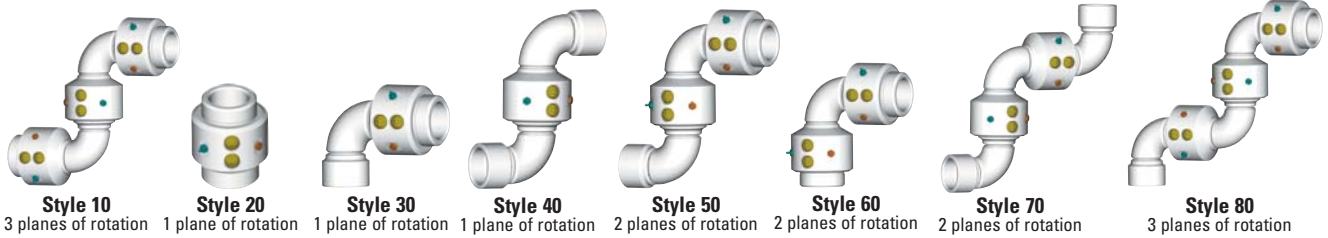

Style (Planes of Rotation)

Construction

Conventional Hose Reel Swivels	26 - Aluminum Hose Reel 28 - Ductile Iron Hose Reel
Conventional Swivels	32 - Steel, High Pressure Cast 33 - Bronze 34 - Steel, Fabricated 36 - Aluminum 37 - 316 Stainless Steel, Cast 38 - Ductile Iron 39 - 316 Stainless Steel, Fab.
Endura Split Flange Swivels	74 - Steel Endura LPG Hose Reel 79 - 316 SST Endura LPG Hose Reel 82 - Steel Endura DSF Single Race 84 - Steel Endura DSF Dual Race 87 - 316 SST Endura DSF Single Race 89 - 316 SST Endura DSF Dual Race Alloy 20, Hastelloy [®] , Monel [®] , Duplex, and other materials available

Style 44 is drop tube swivel w/handle. Styles 35, 45, 55 have threaded boss. Styles 56, 58 76, 78 have spring balance attachment lugs.

3420F - 0403

End Connections

- F** - 150 lb. ANSI flange both ends
- F3** - 300 lb. ANSI flange both ends
- FFT** - 150 lb. ANSI flanged inlet x TTMA tank truck flange outlet
- FJ** - For submerged use, 150 Lb. ANSI flange both ends
- FO** - 150 lb. flange x female NPT threads
- FSB** - 150 lb. flange both ends, with spring balance attachment lugs
- FT** - TTMA tank truck flange both ends
- FTH** - TTMA tank truck flange both ends, with handle
- VO** - Victaulic[®] x female NPT threads
- FTO** - TTMA tank truck flange inlet x female NPT threaded outlet
- J** - For submerged use
- LFT** - Long swivel joint with TTMA tank truck flanges
- TFT** - Female NPT threaded inlet x TTMA tank truck flange outlet
- VOG** - Female NPT threads x Victaulic[®] groove, hard coat anodized aluminum
- W** - Beveled for welding both ends

NO SUFFIX LETTER indicates Female NPT threads both ends. 300 lb. flanges available on some models. BSPT threads available.

Seal Materials

- 1 - Buna-N (Standard)
 - 2 - Fluorocarbon
 - 3 - PTFE Silicone (FDA Approved)
 - 4 - EPDM
 - 9 - Kalrez[®]
- Kalrez[®], Chemraz[®] and other seal materials available

Size

- 007 - 3/4"
- 010 - 1"
- 012 - 1-1/4"
- 015 - 1-1/2"
- 020 - 2"
- 030 - 3"
- 040 - 4"
- 060 - 6"
- 080 - 8"
- 100 - 10"
- 120 - 12"

Availability of styles, sizes and materials may vary depending upon swivel configuration. Consult OPW Customer Service regarding your exact requirements.